

DOCUMENT RESUME

ED 446 898

SE 063 523

AUTHOR Damatto, T.; Maegava, L. M.; Filho, R. Maciel
TITLE The Use of the Software MATLAB To Improve Chemical Engineering Education.
PUB DATE 2000-00-00
NOTE 7p.
PUB TYPE Reports - Descriptive (141)
EDRS PRICE MF01/PC01 Plus Postage.
DESCRIPTORS *Chemical Engineering; *Computer Software; Computer Uses in Education; Educational Technology; Engineering Education; Foreign Countries; Higher Education; Undergraduate Study
IDENTIFIERS Brazil

ABSTRACT

In all the Brazilian Universities involved with the project "Prodenge-Reenge", the main objective is to improve teaching and learning procedures for the engineering disciplines. The Chemical Engineering College of Campinas State University focused its effort on the use of engineering softwares. The work developed by this project has allowed all Chemical Engineering undergraduates to deal with commercial softwares which make engineering calculations and estimates easier. The following works aids Chemical Engineering Process Simulation and Control improvement through the use of the commercial software MATLAB. The main concern is to develop some useful case studies which are able to bring out the important characteristics for the control structure design and implementation. Beyond the process simulation and control application, the user has the main concepts related to control theory readily available in an interactive fashion. The present work has been divided in two parts. The first one consists of Process Control fundamental theory so that an undergraduate can either review or have a first contact with the subject. The second part of the work is an ideal binary distillation column study where some important aspects of the control theory have been implemented. (Author)

THE USE OF THE SOFTWARE MATLAB TO IMPROVE CHEMICAL ENGINEERING EDUCATION

T. Damatto¹, L.M. Maegava² and R. Maciel Filho³
Chemical Engineering College
Campinas State University (UNICAMP)
C.P. 6066, 13083 970, Campinas, S.P., Brazil

ABSTRACT - In all the Brazilian Universities involved with the project "Prodenge - Reenge", the main objective is to improve teaching and learning procedure for engineering disciplines. The Chemical Engineering College of Campinas State University focused its effort on the use of engineering softwares. The work developed by this project has allowed all Chemical Engineering undergraduates to deal with commercial softwares which make engineering calculations and estimates easier. The following work aims Chemical Engineering Process Simulation and Control improvement through the use of the commercial software MATLAB.

The main concern is to develop some useful case studies which are able to bring out the important characteristics for the control structure design and implementation. Beyond the process simulation and control application, the user has the main concepts related to control theory readily available in an interactive fashion.

The present work has been divided in two parts. The first one consists of Process Control fundamental theory so that an undergraduate can either review or have a first contact with the subject. The second part of the work is an ideal binary distillation column study where some important aspects of the control theory have been implemented.

Part One

The first part consists of some important process control definitions. Some of them are presented below.

Types of variables

The process variables can be divided in 3 groups: manipulated variables, controlled variables and load variables.

- Manipulated variables

They are independent variables which are entering or leaving the process and can be changed to make the control.

- Controlled variables

They are the variables in which the control will be made. This control can be made either maintaining these variables as constant as possible or making them follow a desired trajectory.

Example: Temperature inside a reactor.

- Load variables

It is not possible to manipulate with these variables. Although the effects of the load variables, the control system must be prepared to work perfectly.

What is a controller ?

The construction and operation details of a controller change from manufacturer to manufacturer, but its basic functioning is the same.

All controller aims to compare the signal which comes from the transmitter with the set-point and sends a signal to the control valve. The way that the controller compares the process signal with the set point depends on the type of action wanted. Basically there are 3 kinds of actions in a feedback controller: proportional action, integral action and derivative action.

Proportional controller (P)

The output signal is compared to the set-point and is changed proportionally to the input signal error. A

¹ Scientific initiation advised student.

² Advisor.

³ Advisor.

PERMISSION TO REPRODUCE AND
DISSEMINATE THIS MATERIAL HAS
BEEN GRANTED BY

S. Rocha

TO THE EDUCATIONAL RESOURCES
INFORMATION CENTER (ERIC)

U.S. DEPARTMENT OF EDUCATION
Office of Educational Research and Improvement
EDUCATIONAL RESOURCES INFORMATION
CENTER (ERIC)

☒ This document has been reproduced as
received from the person or organization
originating it.

☐ Minor changes have been made to
improve reproduction quality.

• Points of view or opinions stated in this
document do not necessarily represent
official OERI position or policy.

proportional controller just acts when an error is measured. The equation of this type of controller is:

$$m(t) = \bar{m} + K_c (C_{sp} - C) \quad (1)$$

where:

$m(t)$ = controller output signal which adjusts the control valve

$\bar{m}(t)$ = controller output signal when the error is zero

K_c = controller gain

C = process signal from transmitter

C_{sp} = set-point signal (process desired signal)

$C - C_{sp}$ = error ($e(t)$)

$$m(t) = \bar{m} + \frac{1}{\tau_I} e(t) dt \quad (2)$$

where:

τ_I = integral time

Proportional Integral Derivative Controller (PID)

All of the three actions (proportional, integral and derivative) are included. The derivative action is an anticipative action where the controller aims to anticipate the future system characteristic based on the derivative of the error (the time rate of change of the error). This action is quick and is always in the opposite direction of the error occurred in the system. The equation of a proportional integral controller is:

$$m = \bar{m} + K_c \left[e + \frac{1}{\tau_I} \int e dt + \tau_D \frac{de}{dt} \right] \quad (3)$$

where:

τ_D = derivative time

Control Strategies

There are many control strategies. Some of them are presented below.

Feedback Control

The variable wanted to be controlled is measured and compared to a desired value (the set-point). The error between the process variable and the set-point is turned into an input so that the controller can act in the system. Therefore, the controller does not make any action until an error in the system is detected. It is an action to bring the system back to the set-point.

Feedforward Control

The variable is measured and a corrective action is taken before it upset the process. It is basically an action to maintain the system in the set-point. The

Proportional Integral Controller (PI)

An integral controller has a proportional plus an integral action. In an integral action the control valve moves based on the time integral of the error. This action aims to bring back the system to the set-point and also avoids it to go away from the set point. One important characteristic of such controller is that, due to the integral action, the response can be very slow. The equation of this type of controller is:

great advantage of this strategy is that it allows, theoretically, a perfect control. However, in many applications this is not feasible.

Feedforward / Feedback control

Feedforward control is often used in combination with feedback control. Each type of control compensates the disadvantages of the other one.

Ratio control

This is a special type of feedback control. The objective is not to control the performance of two independent variables M , L but to control the ratio R_a :

$$R_a = \frac{M}{L} \quad (4)$$

Some applications of ratio control are, for instance, the control of a specific reflux ratio for a distillation column or the holding of a fuel air ratio to a furnace at an optimum value.

Part Two

The second part of this work is an ideal binary distillation column study. Several additional assumptions and idealizations were made. These hypothesis are sometimes valid but they are frequently only crude approximations. However, the purpose of studying this simplified model case is to reduce the problem to its most elementary form so that the basic structure of the equations can be clearly seen.

First of all, the column was modeled considering equimolar overflow (whenever a mole of vapor condenses, it vaporizes a mole of liquid), which eliminates an energy equation for each tray. The holdup of vapor is assumed negligible and a simple linear relationship between the liquid holdup, (M_N) and the liquid flow rate leaving the tray, L_N is also considered. A further assumption made is a pure binary system with constant molar relative volatility α through the column and perfect 100 percent efficient trays. The variables used to model the column are presented below:

N_s = feed tray of the column
 F = feed rate (moles/s)
 x_F = composition of liquid in the feed tray
 M_D = holdup of liquid in the reflux drum (moles)
 x_D = composition of the liquid in the drum
 N_T = top tray of the column
 y_{NT} = composition of vapor in the top of the column
 R = rate of reflux (moles/s)
 D = rate of overhead distillate product removed (moles/s)
 B = rate of liquid bottoms product removed (moles/s)
 x_B = liquid composition in the base of the column
 V = rate of vapor generated in the reboiler of the column (moles/s)
 M_B = holdup in the reboiler (moles)
 M_N = holdup on each tray (moles)
 x_N = composition of liquid in each tray
 y_N = composition of vapor in each tray
 β = hydraulic constant of the trays
 R_0 = initial reflux rate
 \bar{M}_N = constant

There are 4 equations per tray: a total and a component continuity, a liquid hydraulic equation and a vapor-liquid equilibrium equation. These equations are presented below.

Vapor-liquid equilibrium equation:

$$y_n = \frac{\alpha x_n}{1 + (\alpha - 1)x_n} \quad (5)$$

Liquid hydraulic equation:

$$L_N = \bar{L}_N + \frac{M_N - \bar{M}_N}{\beta} \quad (6)$$

Total continuity:

$$\frac{d(M_N)}{dt} = L_{N+1} - L_N \quad (7)$$

Component continuity:

$$\frac{d(M_N x_N)}{dt} = L_{N+1} x_{N+1} - L_N x_N + V y_{N-1} - V y_N \quad (8)$$

A feedback control was made through 2 controllers PI which change the reflux R and the vapor V to control overhead distillate composition x_D and bottom composition x_B . The equations for each controller are:

$$V = V_0 - K_{c_B} \bar{\text{err}}_B + \frac{1}{\tau_{IB}} \text{err}_B \quad (9)$$

where:

$$\text{err}_B = x_B \text{ set-point} - x_B$$

$$R = R_0 + K_{c_D} \bar{\text{err}}_D + \frac{1}{\tau_{ID}} \text{err}_D \quad (10)$$

where:

$$\text{err}_D = x_D \text{ set-point} - x_D$$

The initial conditions given for the column are:

$$N_T = 20$$

$$x_D \text{ set-point} = 0.98$$

$$x_B \text{ set-point} = 0.02$$

$$x_F \text{ set-point} = 0.5$$

$$N_F = 10$$

$$M_{D0} = 100 \text{ moles}$$

$$M_{B0} = 100 \text{ moles}$$

$$M_0 = 10 \text{ moles}$$

$$R_0 = 128.01 \text{ moles/s}$$

$$V_0 = 178.01 \text{ moles/s}$$

$$F = 100 \text{ moles/s}$$

$$\beta = 0.1$$

$$\alpha = 2$$

The constants of the 2 controller are:

$$K_{cD} = 1000$$

$$K_{cB} = 1000$$

$$\tau_D = 5$$

$$\tau_B = 1.25$$

To make the control of the given column, a program was made in the software MATLAB. The program asks the student a perturbation in the composition of the feed stream. The program is listed below:

```

% initial variables
NT=20;NF=10;MDO=100;MBO=100;MO=10;
RO=128.01;VO=178.01;F=100;BETA=0.1;
ALFA=2;
% CONTROLLER CONSTANTS
KCD=1000;KCB=1000;
TAUD=5;TAUB=1.25;
ERINTB=0;ERINTD=0;
% Perturbation
Z=input('Enter with a perturbation between 0 and 1
Z=');
% INITIAL VALUES OF X
XB=0.02;
X=[0.035 0.05719 0.08885 0.1318 0.18622 0.24951
0.31618 0.37948 0.43391 0.47688 ...
0.51526 0.56295 0.61896 0.68052 0.74345 0.80319
0.85603 0.89995 0.93458 0.96079];
XD=0.98;
% initial conditions
for N=1:NT
M(N)=MO;
MX(N)=M(N)*X(1,N);
LO(N)=RO+F;
if N>NF
LO(N)=RO;
end;
end;
Time=0;DELTA=0.005;ERINTD=0;ERINTB=0;i=1;
while Time<12
% LIQUID HYDRAULIC EQUATION AND VLE
for N=1:20
Y(N)=ALFA*X(1,N)/(1+(ALFA-1)*X(1,N));
L(N)=LO(N)+(M(N)-MO)/BETA;
end;
YB=ALFA*XB/(1+(ALFA-1)*XB);
  
```

```

% 2 CONTROLLERS FEEDBACK PI
ERRB=0.02-XB;
ERRD=0.98-XD;
V=VO-KCB*(ERRB+ERINTB/TAUB);
R=RO+KCD*(ERRD+ERINTD/TAUD);
D=V-R;
B=L(1)-V;
if R<0 disp('level too low or unreal composition ')
end;
if V<0 disp('level too low or unreal composition ')
end;
if D<0 disp('level too low or unreal composition ')
end;
if B<0 disp('level too low or unreal composition ')
end;
% CÁLCULATION OF DERIVATIVES
XBDOT=(L(1)*X(1,1)-V*YB-B*XB)/MBO;
MDOT(1)=L(2)-L(1);
MXDOT(1)=V*(YB-Y(1))+L(2)*X(1,2)-L(1)*X(1,1);
for N=2:NF-1
MDOT(N)=L(N+1)-L(N);
MXDOT(N)=V*(Y(N)-Y(N))+L(N+1)*X(1,N+1)-
L(N)*X(1,N);
end;
% FEED TRAY
MDOT(NF)=L(NF+1)-L(NF)+F;
MXDOT(NF)=V*(Y(NF)-Y(NF))+L(NF+1)*X(1,NF+1)-L(NF)*X(1,NF)+F*Z;
for N=(NF+1):(NT-1)
MDOT(N)=L(N+1)-L(N);
MXDOT(N)=V*(Y(N)-Y(N))+L(N+1)*X(1,N+1)-
L(N)*X(1,N);
end;
MDOT(NT)=R-L(NT);
MXDOT(NT)=V*(Y(NT)-Y(NT))+R*XD-
L(NT)*X(1,NT);
XDDOT=V*(Y(NT)-XD)/MDO;
% Euler Integration
Time=Time+DELTA;
XB=XB+DELTA*XBDOT;
for N=1:NT
M(N)=M(N)+MDOT(N)*DELTA;
MX(N)=MX(N)+MXDOT(N)*DELTA;
X(1,N)=MX(N)/M(N);
end;
XD=XD+XDDOT*DELTA;
ERINTD=ERINTD+ERRD*DELTA;
ERINTB=ERINTB+ERRB*DELTA;
A(i,:)=[ Time XB X(1,10) XD R V];
i=i+1;
end;
figure(1);plot(A(:,1),A(:,2),'c-'),xlabel('Time
[hr]'),ylabel('XB');grid;
figure(2);plot(A(:,1),A(:,3),'r-'),xlabel('Time
[hr]'),ylabel('XF');grid;
figure(3);plot(A(:,1),A(:,4),'g-'),xlabel('Time
[hr]'),ylabel('XD');grid;
figure(4);plot(A(:,1),A(:,5),'b-'),xlabel('Time
[hr]'),ylabel('R (moles/hr)');grid;
figure(5);plot(A(:,1),A(:,6),'m-'),xlabel('Time
[hr]'),ylabel('rate of vapor (moles/hr)');grid;
For a step perturbation in the composition of the feed
stream from 0.5 to 0.55, the program gives the
following graphics:

```

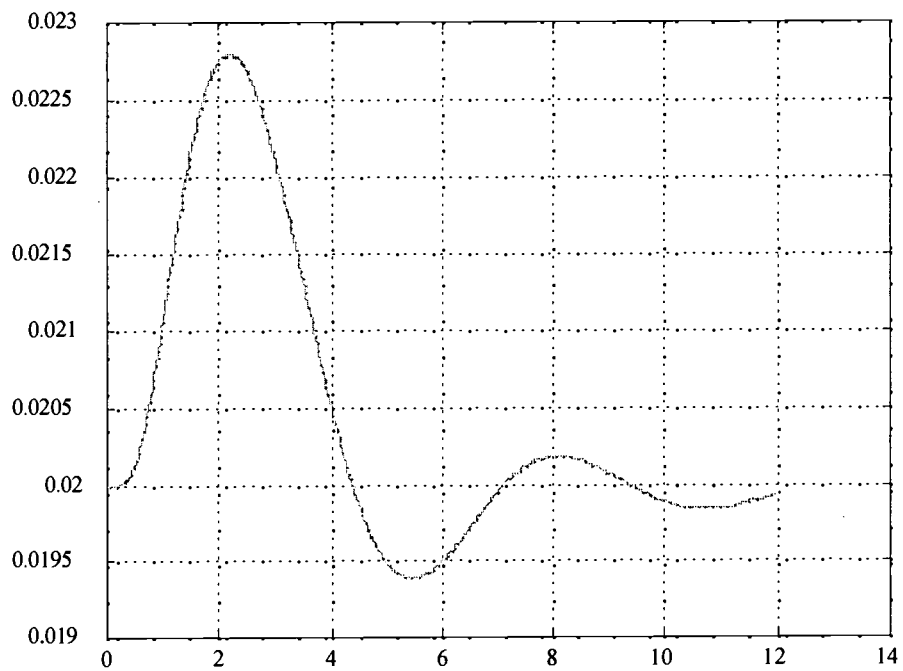


Figure 1. Graphic of composition x_B X time (hours)

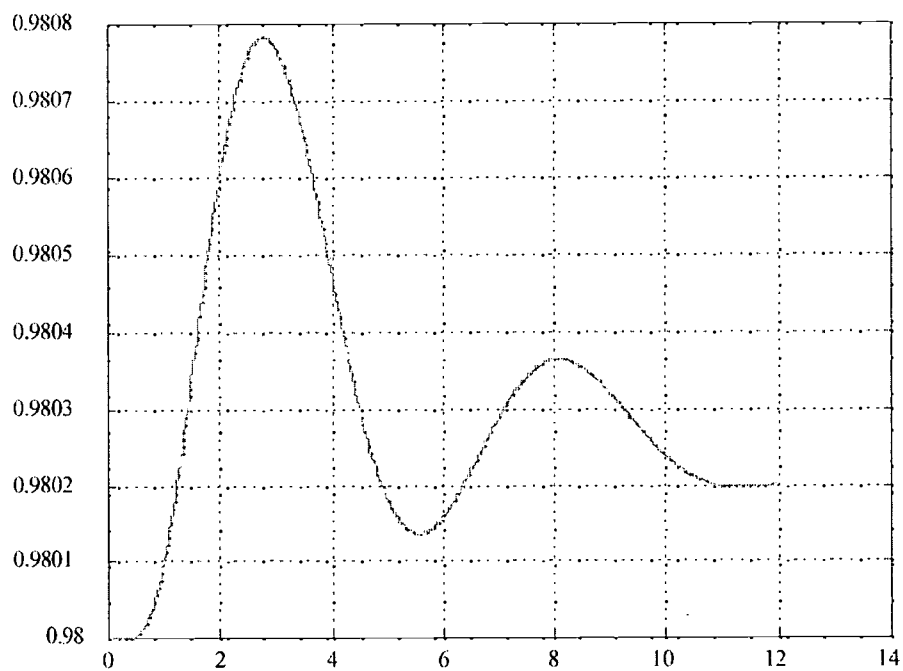


Figure 2. Graphic of composition x_D X time (hours)

Observing the graphics it can be seen that, after the perturbation, the control acts in the system and the compositions stabilize.

output

Reenge" was encouraged as well as the undergraduates' contribution.

Other activities

All of the present work will be accessible to all Chemical Engineering undergraduates of UNICAMP through home-pages to create a deep interaction between the students and the studied subjects. Moreover, 2 performances regarding this work were made to all professors of Chemical Engineering College of UNICAMP. In both lectures the participation of all professors in the project "Prodenge-

References

- 1) Luyben, W.L; "Process Modeling, Simulation and Contro for Chemical Engineers"; 2nd Edition; Mc Graw-Hill, 1974.
- 2) Seborg, Dale E., Thomas F. Edgar and Duncan A. Mellichamp; "Process Dynamics and Control"; 1st Edition; John Wiley and Sons, 1989.

BEST COPY AVAILABLE

5503553

U.S. Department of Education
Office of Educational Research and Improvement (OERI)
[Image] National Library of Education (NLE) [Image]
Educational Resources Information Center (ERIC)
Reproduction Release
(Specific Document)

I. DOCUMENT IDENTIFICATION:

Title: *The Use of the Software MATLAB to Improve Chemical Eng. Educ.*
Author(s): *Samatto, Margara, Filho*
Corporate Source: _____ Publication Date: _____

II. REPRODUCTION RELEASE:

In order to disseminate as widely as possible timely and significant materials of interest to the educational community, documents announced in the monthly abstract journal of the ERIC system, Resources in Education (RIE), are usually made available to users in microfiche, reproduced paper copy, and electronic media, and sold through the ERIC Document Reproduction Service (EDRS). Credit is given to the source of each document, and, if reproduction release is granted, one of the following notices is affixed to the document.

If permission is granted to reproduce and disseminate the identified document, please CHECK ONE of the following three options and sign in the indicated space following.

The sample sticker shown below will be affixed to all Level 1 documents [Image] The sample sticker shown below will be affixed to all Level 2A documents [Image] The sample sticker shown below will be affixed to all Level 2B documents [Image]

<input checked="" type="checkbox"/> Level 1 [Image] Check here for Level 1 release, permitting reproduction and dissemination in microfiche or other ERIC archival media (e.g. electronic) and paper copy. Documents will be processed as indicated provided reproduction quality permits.	Level 2A [Image] Check here for Level 2A release, permitting reproduction and dissemination in microfiche and in electronic media for ERIC archival collection subscribers only	Level 2B [Image] Check here for Level 2B release, permitting reproduction and dissemination in microfiche only
---	---	--

If permission to reproduce is granted, but no box is checked, documents will be processed at Level 1.

I hereby grant to the Educational Resources Information Center (ERIC) nonexclusive permission to reproduce and disseminate this document as indicated above. Reproduction from the ERIC microfiche, or electronic media by persons other than ERIC employees and its system contractors requires permission from the copyright holder. Exception is made for non-profit reproduction by libraries and other service agencies to satisfy information needs of educators in response to discrete inquiries.

Signature: *J.C. Rocha*

Printed Name/Position/Title: *SANDRA C.S. ROCHA*
PROFESSOR

Organization/Address:

DTF / FEA / UNICAMP
C.P. 6066

Telephone:

55-19-37883929

Fax:

55-19-3788-3922

E-mail Address:

Date:

13083-970 - CAMPINAS
S. PAULO - BRAZIL

rocha@feg.unicamp.br

12/15/2000.

III. DOCUMENT AVAILABILITY INFORMATION (FROM NON-ERIC SOURCE):

If permission to reproduce is not granted to ERIC, or, if you wish ERIC to cite the availability of the document from another source, please provide the following information regarding the availability of the document. (ERIC will not announce a document unless it is publicly available, and a dependable source can be specified. Contributors should also be aware that ERIC selection criteria are significantly more stringent for documents that cannot be made available through EDRS.)

Publisher/Distributor:

Address:

Price:

IV. REFERRAL OF ERIC TO COPYRIGHT/REPRODUCTION RIGHTS HOLDER:

If the right to grant this reproduction release is held by someone other than the addressee, please provide the appropriate name and address:

Name:

Address:

V. WHERE TO SEND THIS FORM:

Send this form to the following ERIC Clearinghouse:

ERIC/CSMEE
1929 Kenny Road
Columbus, OH 43210-1080